



SHIELD PRO

Covering all waterproofing fields such as bridges, civil buildings, industry & military.



WATERPROOF COATING

Transparent Waterproof Adhesive

INDIA'S FIRST IMPORTED BRAND PRODUCT ISO 9001: 2015 CERTIFIED COMPANY









TRANSPARENT WATERPROOF COATING

INVISIBLE FILM

FORMING

INVISIBLE GUARDIAN







Environmentally Friendly Safe, Healthy, Odorless

Environmentally friendly coatings with no pungent odor

Cleaning Products:

Non-toxic, biodegradable formulas (often fragrance-free or naturally scented with essential oils).

Paints and Finishes:

Low or zero VOC (Volatile Organic Compounds) for better indoor air quality.

Building Materials:

Sustainable, non-toxic, and natural materials like bamboo, reclaimed wood, or natural insulation.

Personal Care Products:

Organic, natural, or plant-based cosmetics, soaps, and deodorants.

Textiles and Bedding:

Organic cotton, wool, or linen that is processed without harsh chemicals.



6 Core Highlights Reasons for choosing us



Colorless Transparent



Operation Simple



One Brush Stop Leakage



Durable Acid - Base



Green Environment Protection




Film Forming Stable





Do not change the color of walls or tiles not affecting aesthetics

High temperature resistance, Anti freezing, Anti yel-lowing & No peeling

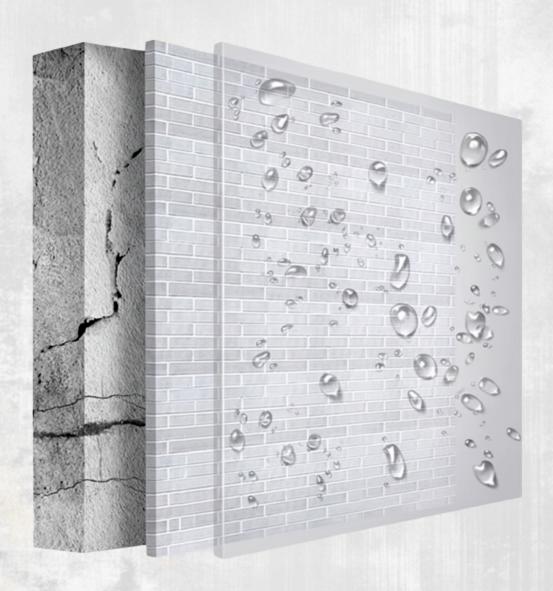

Concrete the basic level

Exterior wall surface


Transparent Waterproof layer




Do You also have the following troubles?

Say goodbye to repeated water leaks, Start with UV Shield Pro











Strong UV Resistance Not afraid of sunlight and aging

After curing, it forms a dense and tough elastic waterproof membrane with a longer service life.



India Head Off.: B-40 Mayapuri Industrial Area Phase 1 ,New Soudi Arabia/Llae Head Off : Al Rawda District/2,Hamed Al J



Brush in the morning & use in the afternoon faster waterproofing


Using special polymer copolymers as the base material, Greatly reducing labor costs



3H QUICK DRYING



6H ENCOUNTER WITH WATER

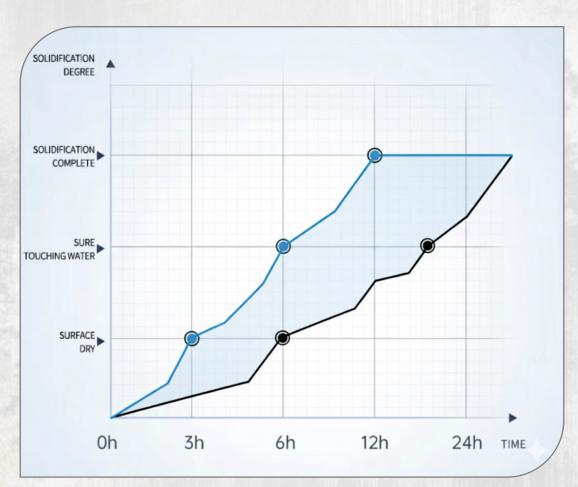

UV SHIELD PRO

Transparent waterproof adhesive

OTHER BRANDS

Transparent waterproof adhesive


Kind Reminder:

Due to the humidity and temperature of the construction environment, there maybe difference during drying, please refer to the actual drying time for accuracy.



High temperature does not soften Low temperature non cracking

Weather it's a cold storm in the north or a scorching heat in the south, they can handle it calmly







The paper towel coated with waterproof adhesive can withstand high temperature baking without melting



A tissue coated with waterproof adhesive that can with stand freezing below zero without cracking



Product Parameter

Product information description



PRODUCT SPECIFICATION

1 KG and 5 KG

PRODUCT CHARACTERISTIC

Colorless And Transparent, Easy To Operate, One Brush Leak Proof, Stable Film Formation, Acid And Alkali Resistance, Green And Environmentally Friendly

SCOPE OF APPLICATION

External Walls, Window Sills, Brick Gaps, Etc.



Widely Applicable


Transparent and invisible, brush where there is leakage Transparent and trace less after drying, making it an invisible rain coat for walls














- Transparent after drying...



Construction Process

Simple 3 Step construction easily waterproof and repaid leaks



1 GRASSROOTS TREATMENT


The base surface must be flat, dry, free of oil stains, dust and unevenness cracked areas should be filled with gaps before construction, for large gaps.

They should be sealed with water before painting.



POST COATING TREATMENT

Maintain ventilation and prohibit stepping on or getting into water. After the coating is completely dry, conduct a water spraying experiment and acceptance.



2 PAINTING

Apply two to three coats, as evenly as possible, with each coat perpendicular to the direction of the previous coat. the next process can only proceed after each coat of film is completely dry. The joints and minor cracks in the wall tiles must be painted longitudinally along the direction of the fine joints (or brick joints), and the base surface should be painted horizontally after the coating film is dry.





Our Special Clients



















































Marketed by:

INDIA HEAD OFFICE:

B-40 Mayapuri Indl. Area Phase-1 ,New Delhi -110064,India

M.: +91 9999809983

E.: Sales@injectiongroutresin.com

W.: injectiongroutresin.com

SAUDI ARABIA/UAE HEAD OFFICE:

Al Rawda District/2, Hamed Al Jasser St PO Box 8515 Jeddah 23435 Kingdom of Saudi Arabia

M.: +966 50 277 8692

E.: admin@injectiongroutresin.com

W.: injectiongroutresin.com











